

# NEWTOP

*Bring New Passion Home*



SHANGHAI NEWTOP MACHINERY CO.,LTD.

Add: 101B Building 6 Xinqiao Creative Park No 183 Yinshan RD Pudong Shanghai China

Tel: +86-21-51692011 Fax: +86-21-51692022

Web: [www.newtopen.com](http://www.newtopen.com) E-mail: [online@newtop.com.cn](mailto:online@newtop.com.cn)

# NEWTOP

*Bring New Passion Home*

## GARDEN MACHINERY CATALOGUE





# Provide Professional and Integrated Solution to Garden Machinery



At NEWTOP, we spent twenty years in constantly looking for ways to deliver reliable and powerful gasoline machines. Our only aim is to make gardening work easier and more enjoyable.

With years' development, our company has reached an annual capacity of 500,000 units of machines . Up to now, we have established the CNC AL-MG processing center, the injection Mould Center and the Testing Center which include emission testing equipments, gas composition analyzer, magneto testing desk, metal composition analyzer, hardness tester etc.

The adoption of these advanced facilities from America, Germany and Japan enables us to supply top quality machines to customers all over the world with high efficiency. Our complete testing equipments, strict QA procedures and professional engineers ensure the reliability and safety of our machines. Our equipments and technology control standards have reached the internationally advanced level. Our products have passed CE, GS, EURO V , EPA certification, and our company is also certified with ISO9001-2000 standards.

All the staff in the company are doing their job with our faith“Customers and End Users are the Center”, including our experienced service team. With twenty years experience in exporting, they are responsive to our customers' request and efficient in solving possible problems during the whole process of delivery. Our excellent pre-and after-sales service ensures the fast and safe delivery of your goods.

We are pleased to show you our latest generation of products with this catalogue. The thing that every product has in common is to make your work easier, just be happy with us and enjoy browsing through our new catalogue.



## Values

Achieve a win-win cooperation through integrity and honesty;  
Gather people with dreams to seek for excellence.

## Mission

Make garden life more enjoyable by providing more applicable and eco-friendly machines.

## Working Style

We work seriously, meticulously and efficiently. We focus on quality and are loyal to our duties.

## Vision

Create unique values for our customers;  
Make Newtop a prestigious and first-class enterprise.

## Enterprise Certification



## Our Team



## Easiness, convenience and efficiency


are our constant pursuit in quality.  
Consideration, professionalism and your satisfaction  
are our persistent principles in offering service.

You might just see our good quality products.  
You might just enjoy our high level service.  
However, you might not yet have discovered our determination.  
You might not yet have known that we put our

heart and soul on every products.  
We chase the excellence of every detail of our products to meet your gardening design demands.  
We make an effort in every link of our

services to make you feel our friendly concern.  
Because, we know what you really need.



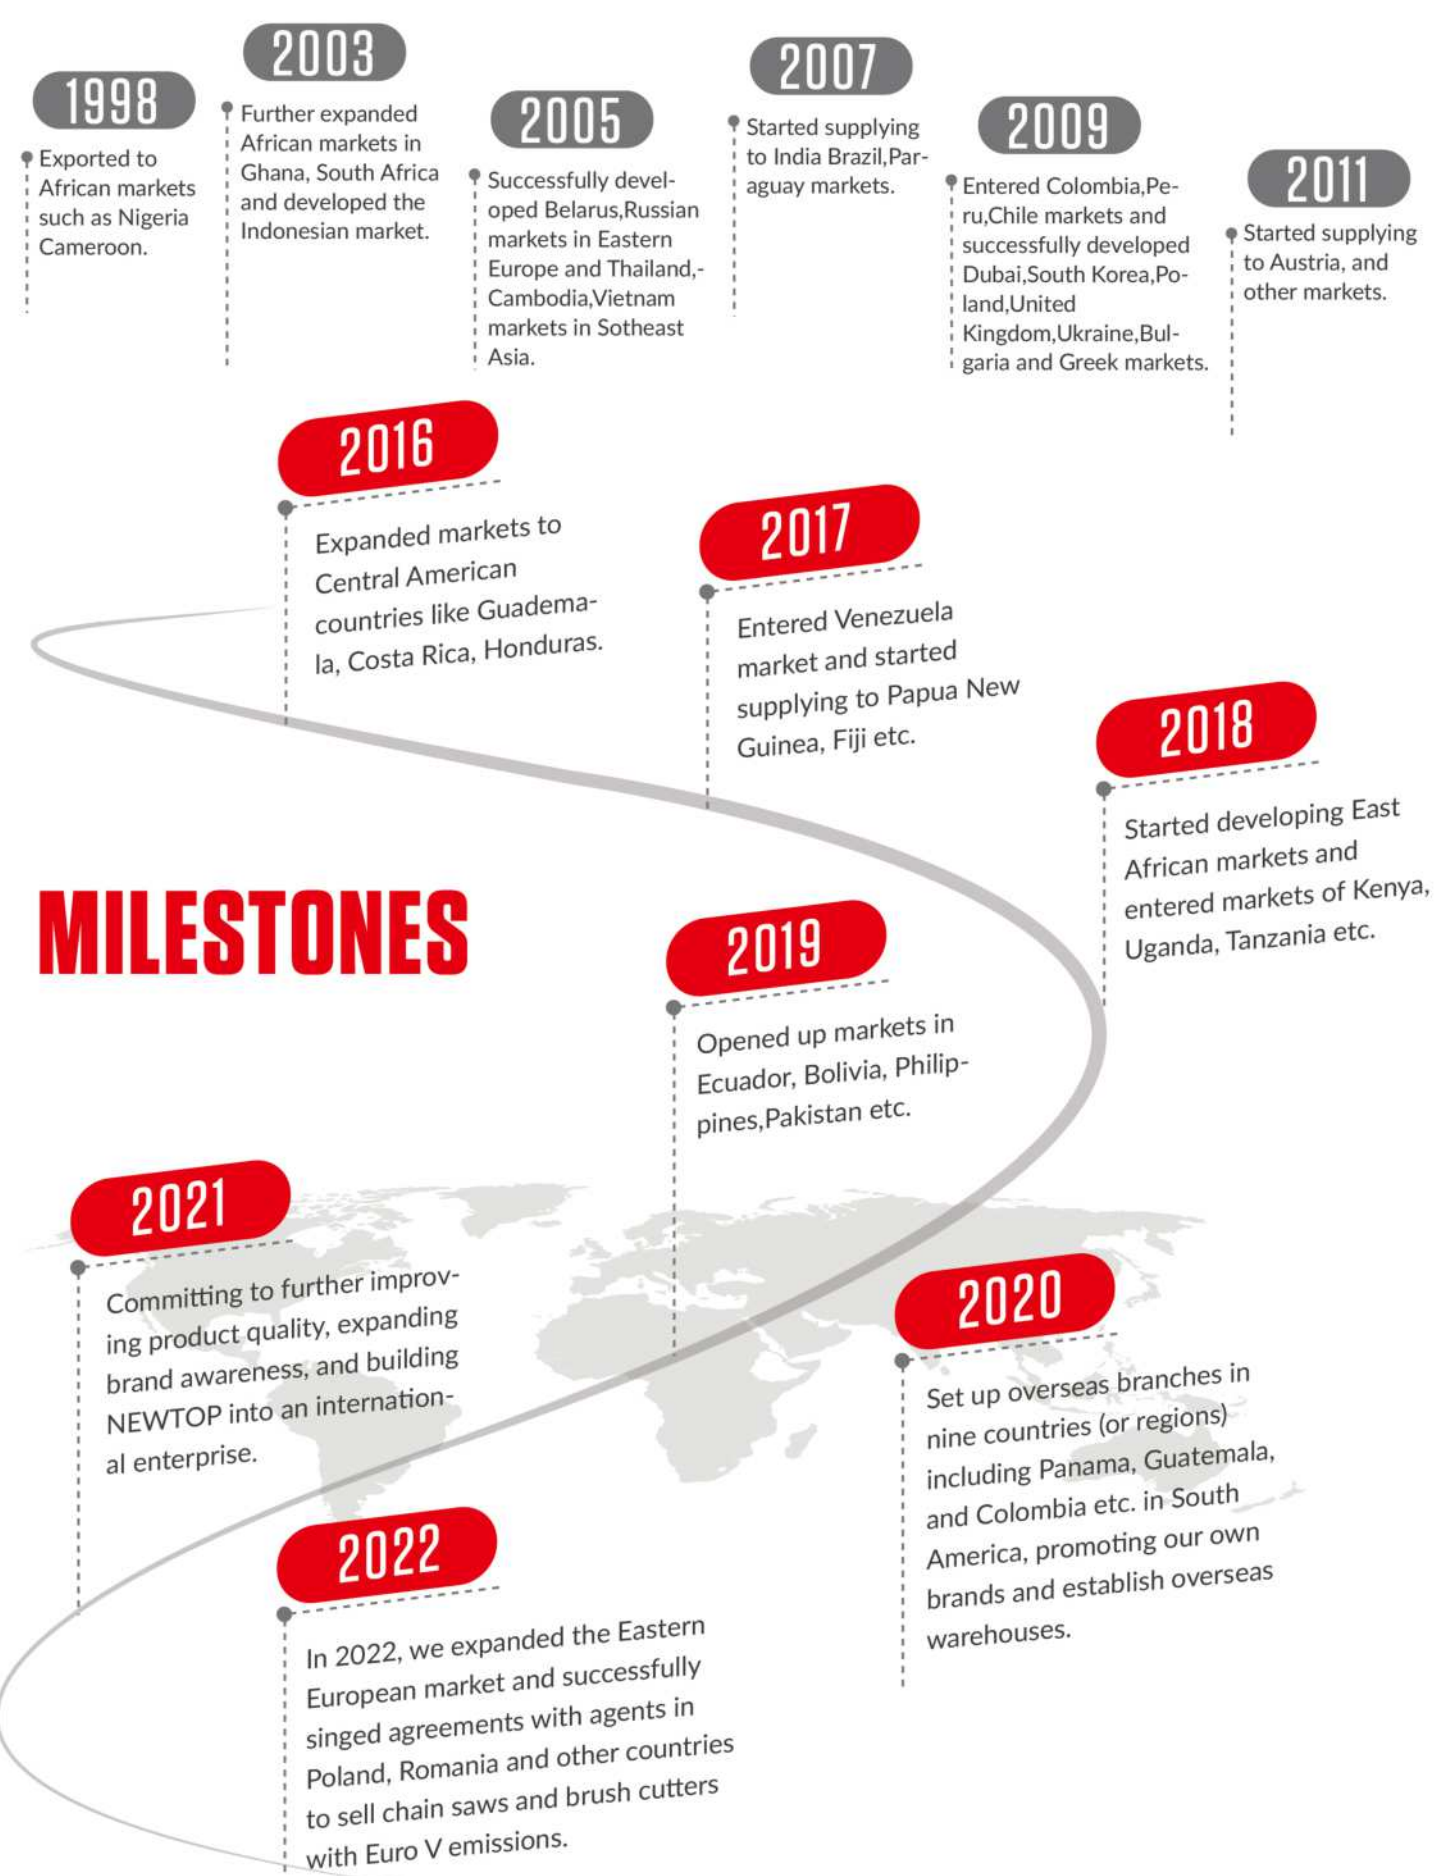

## MILESTONES



## EXHIBITION

### Customer Remarks:

Cooperating with NEWTOP is a pleasant experience. They have strict quality control, and advanced assembly lines, strict inspection before delivery and professional after-sales service team. I have visited their head quarter in Shanghai, and was

impressed by their enthusiasm, sincerity and spirit of striving for perfection. The efficient management and strict process in their factory convinced me that products of NEWTOP are reliable. With strict quality control each part is flawless and assembled quickly and accurately,

each machine is perfectly treated. I have cooperated with NEWTOP for years, their assured quality, in time delivery and great after-sales service make me feel relaxed and comfortable. Shanghai NEWTOP is trustworthy.





# CONTENTS

Chain Saws .....	01
Brush Cutters .....	31
Pole Saws .....	47
Multi-Function Tools .....	49
Sprayers .....	51
Earth Augers .....	61
Tea Picking Machines .....	64
Hedge Trimmers .....	65
Leaf Blowers .....	67
Water Pumps .....	72
Generators .....	75
Power Engines .....	79
Spare Parts .....	83



PROFESSIONAL CHAINSAW **NO.1**

Low noise  
Low emissions  
High power



**105.7CC** Displacement


**4.5KW** Rated Power

**10.5KG** Dry Weight



**NT10500**

Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	58×40mm
Displacement	105.7cc
Power & Relevant Speed	4.5kW/7500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	1200ml
Engine Oil Tank Capacity	530ml
Guide Bar Size	25"-42"
Chain Pitch	.404"
Chain Gauge	.063"
G.W./N.W.	12.5kg/10.5kg

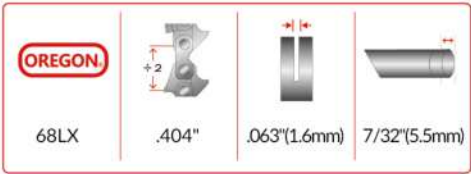

**TOP SPARK PLUG**  
Continuous ignite, high power

**NEW RUBBER HANDLE**  
Handle made of new rubber material, good in shock absorption and comfortable for use during work.

**LARGE HANDLE STARTER**  
Easier to start

**MAGNESIUM CRANKCASE**  
Magnesium Crankcase with smaller weight, better shock absorption and cooling performance.



PROFESSIONAL CHAINSAW

NT10500-AV

Low noise

Low emissions

High power

NEW

PRODUCT

105.7CC

Displacement

4.5KW

Rated Power

10.5KG

Dry Weight



NEW REAR HANDLE DESIGN

Helps shock absorption much and adjust the throttle , improves work efficiency.

+ 60%

DAMPING STABILITY IMPROVES BY 60% \*

\*compared with NEWTOP other similar products

NEW ANTI VIBRATION SYSTEM

Patented design. Minimizes the violent vibration of the machine. Helps solve the problem of hands numbness, and improves the efficiency of the machine.



NEWTOP

GASOLINE CHAINSAW

+ 15%

CUTTING EFFICIENCY INCREASED BY 15% \*

\*compared with a similar product in the market

+ 35%

REDUCING MACHINE VIBRATION BY 35% \*

\*compared with NEWTOP other similar products



NT10500-AV


ANTI Vibration

HIGH TORQUE

DIGITAL

CHAINSAW

Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	58×40mm
Displacement	105.7cc
Power & Relevant Speed	4.5kW/7500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	1200ml
Engine Oil Tank Capacity	530ml
Guide Bar Size	25"-42"
Chain Pitch	.404"
Chain Gauge	.063"
G.W./N.W.	12.5kg/10.5kg

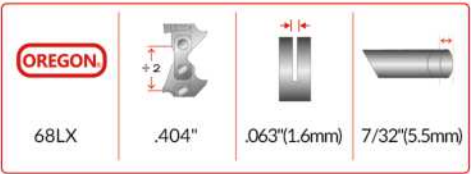



**PROFESSIONAL CHAINSAW** **NO.1**  
**NT9210**

As professional loggers, you should have right assessment on the conditions when cutting the tree: the strongest part of the tree crown, any rot occurs on the trunk and the direction of the wind. Everything will be well solved with right equipment.



91.6CC Displacement

5.2KW Rated Power

7.3KG Dry Weight



WALBRO CARBURETOR & IGNITION



**IMPORTED PAPER AIR FILTER**  
Imported paper in a corrugated manner,Service life increased by 30%.



**NT9210**

Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	54×40mm
Displacement	91.6cc
Power & Relevant Speed	5.2kW/9500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	825ml
Engine Oil Tank Capacity	360ml
Guide Bar Size	20"-42"
Chain Pitch	3/8"/.404"
Chain Gauge	.063"
G.W./N.W.	9kg/7.3kg

OREGON	÷ 2	+	+
75LPX	3/8"	.063"(1.6mm)	7/32"(5.5mm)
75VPX			
68LX	.404"	.063"(1.6mm)	7/32"(5.5mm)



**High-QUALITY CYLINDER**  
High-strength Cast Alloy-Improves the stability by 20%; Inner Plating of Ceramics--Reaches 500H lifespan.

**MAGNESIUM CRANKCASE & SIDE COVER**

1/3 lighter than aluminum, but more stronger & better shock absorption.

**+ 35%**

CUTTING EFFICIENCY INCREASED BY 35%\*  
\*compared with a similar product in the market

**+ 25%**

REDUCING WEIGHT BY 25%\*  
\*compared with NEWTOP same displacement products



**PROFESSIONAL CHAINSAW** **NO.1**  
**NT9200**


As professional loggers, you should have right assessment on the conditions when cutting the tree: the strongest part of the tree crown, any rot occurs on the trunk and the direction of the wind. Everything will be well solved with right equipment.



91.6CC Displacement

5.2KW Rated Power

7.3KG Dry Weight

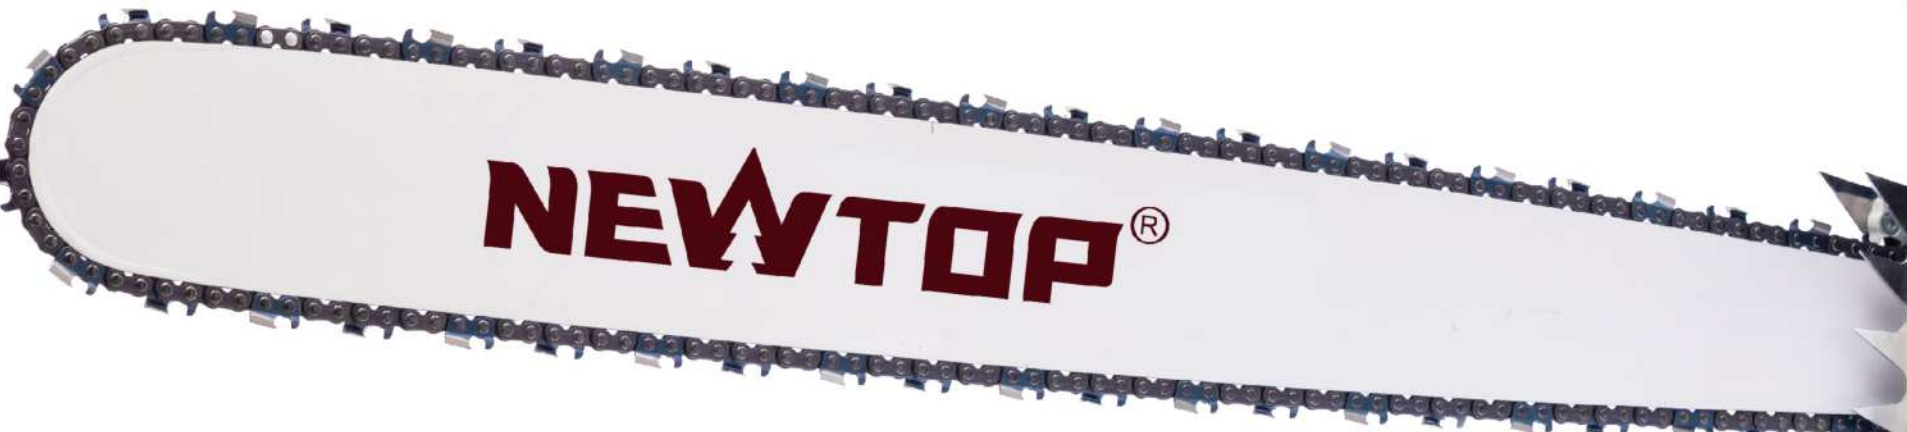

NT9200	
Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	54×40mm
Displacement	91.6cc
Power & Relevant Speed	5.2kW/9500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	825ml
Engine Oil Tank Capacity	360ml
Guide Bar Size	20"-42"
Chain Pitch	3/8"/.404"
Chain Gauge	.063"
G.W./N.W.	9kg/7.3kg

OREGON			
75LPX	3/8"	.063"(1.6mm)	7/32"(5.5mm)
75VPX	.404"	.063"(1.6mm)	7/32"(5.5mm)
68LX			



**LOW NOISE**  
 The latest technology helps reduce noise.

**COMPRESSION RELEASE VALVE**  
 New design button of compression release valve reduces the starting resistance , makeing it easier to start.

**WALBRO CARBURETOR**  
 Use imported Walbro carburetor to improve engine lifetime and work efficiency.

**BRAND NEW RUBBER HANDLE**  
New rubber reduces vibration, to avoid hand numbness problem even long-time working.

**+ 35%**  
 CUTTING EFFICIENCY INCREASED BY 35%\*  
\*compared with a similar product in the market

**+ 25%**  
 REDUCING WEIGHT BY 25%\*  
\*compared with NEWTOP same displacement products



PROFESSIONAL CHAINSAW  
NT7200

Heavy duty chainsaw with fuel-efficient engine. Satisfying scavenging structure, emissions conform to EU V standard. Ergonomically improved handles reduce fatigue. Ideal for working with medium to large strength wood.



72.5CC Displacement

3.6KW Rated Power

6.5KG Dry Weight

WALBRO IGNITION COIL  
Imported Walbro ignition coil, long lifespan, without risk of flameout.



HIGH QUALITY CRANKSHAFT  
20CrMo material, TAIWAN bearing inside, forged three-piece crankshaft for maximum durability for the toughest applications.



WALBRO CARBURETOR  
Imported WALBRO carburetor, stable and continuous output of power.



NEWTOP

GASOLINE CHAINSAW



	NT6200	NT6800	NT7200
Power Type		2.5Stroke,Air Cooling	
Cylinder Diameter × Stroke	48×34mm	50×34mm	52×34mm
Displacement	61.5cc	68cc	72.5cc
Power & Relevant Speed	2.9kW/8000rpm	3.2kW/8200rpm	3.6kW/8500rpm
Fuel Mixture Ratio		25: 1 (Gasoline25:Two-cycle Oil 1)	
Fuel Tank Capacity	750ml	750ml	750ml
Engine Oil Tank Capacity	450ml	450ml	450ml
Guide Bar Size	16"-24"	16"-26"	16"-28"
Chain Pitch	.325"/3/8"	3/8"	3/8"
Chain Gauge	.058"/.063"	.058"/.063"	.058"/.063"
G.W./N.W.	7.9kg/6.1kg	8.1kg/6.3kg	8.4kg/6.5kg

CE

OREGON.			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)



# PROFESSIONAL CHAINSAW

## NT6020

Low vibration chainsaw with extremely low temperature, benefits from new technology. Better bumping design on the shock absorption improves the performance of machines and reduce the user's fatigue when using. Ideal for tree maintenance and timber logging.

55.6CC
Displacement

3.1KW
Rated Power


5.3KG
Dry Weight



**HANDY AIR FILTER COVER**  
Large space inside eases air cooling.  
Air filter knob is set inside to provide excellent sealing.



**WINDOW ON FUEL TANK**  
With small window on fuel tank to check the remain- ing fuel volume.



**NEW DESIGN STARTER ASSY**  
Two-piece and two-color design for starter cover makes it unique and nice in look.




**TOOL-FREE FUEL TANK**  
Tool-free fuel tank cap and oil tank cap.



**TOOLS HIDDEN DESIGN**  
Space available for placing necessary tools on the bottom of chain saw.




	NT4520	NT5220	NT5820	NT6020
Power Type	2 Stroke, Air Cooling			
Cylinder Diameter × Stroke	43×31mm	45×31mm	45.2×34mm	45×35mm
Displacement	45cc	49.3cc	54.5cc	55.6cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm	3.1kW/9500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)			
Fuel Tank Capacity	590ml	590ml	590ml	590ml
Engine Oil Tank Capacity	260ml	260ml	260ml	260ml
Guide Bar Size	16"-20"	18"-22"	18"-24"	20"-28"
Chain Pitch	.325"	.325"	.325"	.325"
Chain Gauge	.058"	.058"	.058"	.058"
G.W./N.W.	6.5kg/5.1kg	6.5kg/5.1kg	6.6kg/5.2kg	7.1kg/5.3kg
CE	EURO V	EURO V	EURO V	EURO V

OREGON			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)



**PROFESSIONAL CHAINSAW**  
**NT5851/ES**

The NEWTOP 58cc Petrol 20" Chainsaw has been engineered and manufactured to NEWTOP's high standard for dependability, ease of operation, and operator safety. When properly cared for, it will give you years of rugged, trouble-free performance.

54.5CC Displacement

2.2KW Rated Power

5.2KG Dry Weight



**200** hours **CONTINUE WORK OVER**

**ALLOY CHAIN**  
Hardened alloy chain, lower kick-back, more durable

**WINDOW ON FUEL TANK**  
With small window on fuel tank to check the remaining fuel volume.

**DAMPING SYSTEM**  
The damping system dampens vibrations from the engine, significantly reducing vibrations at the handle.

**TOOLS HIDDEN DESIGN**  
Space available for placing necessary tools on the bottom of chain saw.

**LOW EMISSION**  
Compliant with emission standards to low fuel consumption, suitable for various purposes.

**COMPATIBLE VARIOUS STARTERS**  
Different appearances can be changed according to requirements.

**TOOL-FREE FUEL TANK**  
Tool-free fuel tank cap and oil tank cap.

**EASY STARTER**



**NT4551/ES**



**NT5251/ES**



**NT5851/ES**

Power Type	2 Stroke, Air Cooling	
Cylinder Diameter × Stroke	43×31mm	45×31mm
Displacement	45cc	49.3cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)	
Fuel Tank Capacity	550ml	550ml
Engine Oil Tank Capacity	260ml	260ml
Guide Bar Size	16"-20"	16"-22"
Chain Pitch	3/8"/.325"	3/8"/.325"
Chain Gauge	.050"/.058"	.050"/.058"
G.W./N.W.	6.5kg/5.1kg	6.5kg/5.1kg
CE	EURO V	

<b>OREGON</b>			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)



## PROFESSIONAL CHAINSAW

### NT5852/ES

The NEWTOP petrol chainsaw with its powerful 2-stroke engine, is a must for any serious gardener, farmers & groundsman. Added safety and performance features like anti-kickback, anti-vibration, and an automatic chain oiler will make the task at hand effortless.

**54.5CC** Displacement

**2.2KW** Rated Power

**5.2KG** Dry Weight



**NEW  
PRODUCT**



**200** **CONTINUE  
WORK OVER**  
hours

**WINDOW ON FUEL TANK**  
With small window on fuel tank to check the remaining fuel volume.

**DAMPING SYSTEM**  
The damping system dampens vibrations from the engine, significantly reducing vibrations at the handle.

**TOOLS HIDDEN DESIGN**  
Space available for placing necessary tools on the bottom of chain saw.

**ALLOY CHAIN**  
Hardened alloy chain, lower kick-back, more durable

**COMPATIBLE VARIOUS STARTERS**  
Different appearances can be changed according to requirements.

**TOOL-FREE FUEL TANK**  
Tool-free fuel tank cap and oil tank cap.

**LOW EMISSION**  
Compliant with emission standards to low fuel consumption, suitable for various purposes.

**EASY  
STARTER**



**NEWTOP**

GASOLINE CHAINSAW



**NT4552/ES**



**NT5252/ES**



**NT5852/ES**

Power Type	2 Stroke, Air Cooling		
Cylinder Diameter × Stroke	43×31mm	45×31mm	45.2×34mm
Displacement	45cc	49.3cc	54.5cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)		
Fuel Tank Capacity	550ml	550ml	550ml
Engine Oil Tank Capacity	260ml	260ml	260ml
Guide Bar Size	16"-20"	16"-22"	16"-24"
Chain Pitch	3/8"/.325"	3/8"/.325"	3/8"/.325"
Chain Gauge	.050"/.058"	.050"/.058"	.050"/.058"
G.W./N.W.	6.5kg/5.1kg	6.5kg/5.1kg	6.6kg/5.2kg
CE	<b>EURO V</b>	<b>EURO V</b>	<b>EURO V</b>

<b>OREGON</b>			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)





# CHAINSAWS

Patent number: ZL 202130378265.6

## PROFESSIONAL CHAINSAW

### NT5853-ES

The NEWTOP petrol chainsaw with its powerful 2-stroke engine, is a must for any serious gardener, farmers & groundsman.



**NEW  
PRODUCT**



**54.5CC** Displacement

**2.2KW** Rated Power

**5.2KG** Dry Weight

**200** **hours** **CONTINUE  
WORK OVER**

#### WINDOW ON FUEL TANK

With small window on fuel tank to check the remaining fuel volume.

#### DAMPING SYSTEM

The damping system dampens vibrations from the engine, significantly reducing vibrations at the handle.

#### TOOLS HIDDEN DESIGN

Space available for placing necessary tools on the bottom of chain saw.

#### ALLOY CHAIN

Hardened alloy chain, lower kick-back, more durable

**EASY  
STARTER**

**EASY STARTER**  
Start easily and quickly. Over 10,000 starting times.

**TOOL-FREE FUEL TANK**  
Tool-free fuel tank cap and oil tank cap.

#### LOW EMISSION

Compliant with emission standards to low fuel consumption, suitable for various purposes.

**NEWTOP**



GASOLINE CHAINSAW



### NT4553-ES



### NT5253-ES



### NT5853-ES

Power Type		2 Stroke, Air Cooling	
Cylinder Diameter × Stroke	43×31mm	45×31mm	45.2×34mm
Displacement	45cc	49.3cc	54.5cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm
Fuel Mixture Ratio		25: 1 ( Gasoline25:Two-cycle Oil 1)	
Fuel Tank Capacity	550ml	550ml	550ml
Engine Oil Tank Capacity	260ml	260ml	260ml
Guide Bar Size	16"-20"	16"-22"	16"-24"
Chain Pitch	3/8"/.325"	3/8"/.325"	3/8"/.325"
Chain Gauge	.050"/.058"	.050"/.058"	.050"/.058"
G.W./N.W.	6.5kg/5.1kg	6.5kg/5.1kg	6.6kg/5.2kg
CE	EURO V	EURO V	EURO V

<b>OREGON</b>			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)

www.newtopen.com

www.newtopen.com



PROFESSIONAL CHAINSAW

NT5860

The NEWTOP petrol chainsaw with its powerful 2-stroke engine, is a must for any serious gardener, farmers & groundsman.

54.5CC

Displacement

2.2KW

Rated Power

5.2KG

Dry Weight





HANDY AIR FILTER COVER

Transparent top cover to check the air filter easily.



WINDOW ON FUEL TANK

With small window on fuel tank to check the remaining fuel volume.



TOOL-FREE FUEL TANK

Tool-free fuel tank cap and oil tank cap.



TOOLS HIDDEN DESIGN

Space available for placing necessary tools on the bottom of chain saw.





	NT4560	NT5260	NT5860
<div> <div>EXTENDED WARRANTY</div> <div> <div>ANTI Vibration</div> <div>HIGH TORQUE</div> <div>DIGITAL ignition</div> <div>CE</div> </div> </div>			
Power Type		2 Stroke, Air Cooling	
Cylinder Diameter × Stroke	43×31mm	45×31mm	45.2×34mm
Displacement	45cc	49.3cc	54.5cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm
Fuel Mixture Ratio		25: 1 ( Gasoline25:Two-cycle Oil 1)	
Fuel Tank Capacity	550ml	550ml	550ml
Engine Oil Tank Capacity	260ml	260ml	260ml
Guide Bar Size	16"-20"	16"-22"	16"-24"
Chain Pitch	3/8"/.325"	3/8"/.325"	3/8"/.325"
Chain Gauge	.050"/.058"	.050"/.058"	.050"/.058"
G.W./N.W.	6.5kg/5.1kg	6.5kg/5.1kg	6.6kg/5.2kg
CE	EURO V	EURO V	EURO V

OREGON	20LPX 20VPX	73LPX 73VPX
<div> <div>3/8"</div> <div>.325"</div> </div>	<div> <div>3/8"</div> <div>.325"</div> </div>	<div> <div>3/8"</div> <div>.325"</div> </div>



PROFESSIONAL CHAINSAW

NT5860-ES

The NEWTOP petrol chainsaw with its powerful 2-stroke engine, is a must for any serious gardener, farmers & groundsman.This model is with easy starter.

54.5CC
Displacement

2.2KW
Rated Power

5.3KG
Dry Weight



HANDY AIR FILTER COVER

Transparent top cover to check the air filter easily.



WINDOW ON FUEL TANK

With small window on fuel tank to check the remaining fuel volume.



TOOL-FREE FUEL TANK

Tool-free fuel tank cap and oil tank cap.



TOOLS HIDDEN DESIGN

Space available for placing necessary tools on the bottom of chain saw.



<div>  </div> <div> <div>    </div> </div>			
	NT4560-ES	NT5260-ES	NT5860-ES
Power Type	2 Stroke, Air Cooling		
Cylinder Diameter × Stroke	43×31mm	45×31mm	45.2×34mm
Displacement	45cc	49.3cc	54.5cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm
Fuel Mixture Ratio	25: 1 ( Gasoline25:Two-cycle Oil 1)		
Fuel Tank Capacity	550ml	550ml	550ml
Engine Oil Tank Capacity	260ml	260ml	260ml
Guide Bar Size	16"-20"	16"-22"	16"-24"
Chain Pitch	3/8"/.325"	3/8"/.325"	3/8"/.325"
Chain Gauge	.050"/.058"	.050"/.058"	.050"/.058"
G.W./N.W.	6.6kg/5.2kg	6.6kg/5.2kg	6.7kg/5.3kg
CE	EURO V	EURO V	EURO V
<div> <div>  </div> <div> <div>  <div> 20LPX 20VPX </div> </div> <div> <div>  <div> 3/8" </div> </div> <div> <div>  <div> .050"(1.27mm) .058"(1.47mm) </div> </div> <div> <div>  <div> .058"(1.47mm) </div> </div> <div> <div>  <div> 3/16"(4.8mm) 5/32"(4.0mm) </div> </div> </div> </div> </div></div></div></div>			

21

www.newtopen.com

www.newtopen.com

22



PROFESSIONAL CHAINSAW

NT5800-ES

The NEWTOP 58cc Petrol 20" Chainsaw has been engineered and manufactured to NEWTOP's high standard for dependability, ease of operation, and operator safety. When properly cared for, it will give you years of rugged, trouble-free performance.

54.5CC

Displacement

2.2KW

Rated Power

5.3KG

Dry Weight

200

hours

CONTINUE WORK OVER

BRAND NEW AIR FILTER SYSTEM

The air enters in vortex, throwing out the heavier particles in the air, helps prolong the service life of the air filter.

BALANCED DESIGN

Balanced design for ease of use and maneuverability.



EASY STARTER

Easy-to-start design, faster and smoother start up.

DIRECT AIR INJECTION CARBURETOR

Direct injection carburetor, better atomization effect, more complete combustion, and more stable output power.



NT4510-ES



NT5210-ES



NT5800-ES




Power Type	2 Stroke, Air Cooling	
Cylinder Diameter × Stroke	43×31mm	45×31mm
Displacement	45cc	49.3cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)	
Fuel Tank Capacity	550ml	550ml
Engine Oil Tank Capacity	260ml	260ml
Guide Bar Size	16"-20"	16"-22"
Chain Pitch	3/8"/.325"	3/8"/.325"
Chain Gauge	.050"/.058"	.050"/.058"
G.W./N.W.	6.6kg/5.2kg	6.6kg/5.2kg

CE

EURO V

EURO V

EURO V

OREGON			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)



PROFESSIONAL CHAINSAW  
NT5800

Powerful chain saw, suitable for most conditions like harvesting, forestry, agriculture and gardening. It combines rugged reliability with convenient and comfortable operation mode.



54.5CC Displacement

2.2KW Rated Power

5.2KG Dry Weight

200 hours CONTINUE WORK OVER

BRAND NEW AIR FILTER SYSTEM

The air enters in vortex, throwing out the heavier particles in the air, helps prolong the service life of the air filter.

BALANCED DESIGN

Balanced design for ease of use and maneuverability.



DIRECT AIR INJECTION CARBURETOR

Direct injection carburetor, better atomization effect, more complete combustion, and more stable output power.



NEWTOP

GASOLINE CHAINSAW



	NT4510	NT5210	NT5800
Power Type		2 Stroke, Air Cooling	
Cylinder Diameter × Stroke	43×31mm	45×31mm	45.2×34mm
Displacement	45cc	49.3cc	54.5cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm
Fuel Mixture Ratio		25:1 (Gasoline25:Two-cycle Oil 1)	
Fuel Tank Capacity	550ml	550ml	550ml
Engine Oil Tank Capacity	260ml	260ml	260ml
Guide Bar Size	16"-20"	16"-22"	16"-24"
Chain Pitch	3/8"/.325"	3/8"/.325"	3/8"/.325"
Chain Gauge	.050"/.058"	.050"/.058"	.050"/.058"
G.W./N.W.	6.5kg/5.1kg	6.5kg/5.1kg	6.6kg/5.2kg
CE	EURO V	EURO V	EURO V

OREGON	20LPX 20VPX	73LPX 73VPX
	.325"	3/8"
	.050"(1.27mm) .058"(1.47mm)	.058"(1.47mm)
	3/16"(4.8mm)	5/32"(4.0mm)





GASOLINE CHAINSAW

PROFESSIONAL CHAINSAW

NT4200

With quick chain tensioning and easy starter, long-life air filter system for long cleaning intervals, tool-less fuel caps for safe and easy refuelling, environmentally-friendly.



40.2CC Displacement

1.7KW Rated Power

4.4KG Dry Weight



NT4200



NT3700

Power Type	2 Stroke, Air Cooling	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	40×32mm	38×32mm
Displacement	40.2cc	36.3cc
Power & Relevant Speed	1.7kW/8500rpm	1.5kW/8500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	410ml	410ml
Engine Oil Tank Capacity	200ml	200ml
Guide Bar Size	14"-18"	14"-18"
Chain Pitch	3/8"/.325"	3/8"/.325"
Chain Gauge	.050"	.050"
G.W./N.W.	5.7kg/4.4kg	5.7kg/4.4kg

CE

OREGON			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)

+ 15%

CUTTING EFFICIENCY INCREASED BY 15%\*  
\*compared with a similar product in the market

+ 15%

REDUCING WEIGHT BY 15%\*  
\*compared with NEWTOP same displacement products



PROFESSIONAL CHAINSAW

NT3200

The NEWTOP NT3200 Chainsaw goes back to basics with improved engine airflow and guard design. Quick pruning, felling of small trees, and clearing of fallen branches after a storm.



31.8CC

Displacement

1.3KW

Rated Power

4.1KG

Dry Weight



NT3200

Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	38×28mm
Displacement	31.8cc
Power & Relevant Speed	1.3kW/9000rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	250ml
Engine Oil Tank Capacity	145ml
Guide Bar Size	14"-16"
Chain Pitch	3/8"
Chain Gauge	.050"
G.W./N.W.	5.9kg/4.1kg

CE

OREGON

91PX

91VXL

3/8"

.050"(1.27mm)

5/32"(4.0mm)

PROFESSIONAL CHAINSAW

NT2510

New design.Light-weight Chain saw for universal use with 2-stroke petrol engine. Sturdy, light and easy to handle, this chainsaw is ideal for both domestic and professional use. Necessary tool for gardening work, for pruning small trees and bushes, as well as for preparing firewood.



25CC

Displacement

0.8KW

Rated Power

2.3KG

Dry Weight



NT2510

Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	34×28mm
Displacement	25cc
Power & Relevant Speed	0.8kW/8500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	180ml
Engine Oil Tank Capacity	140ml
Guide Bar Size	8"/10"
Chain Pitch	3/8"
Chain Gauge	.050"
G.W./N.W.	2.8kg/2.3kg

CE

EURO V

OREGON

91PX

91VXL

3/8"

.050"(1.27mm)

5/32"(4.0mm)



NT2510-ES

2 Stroke, Air Cooling
34×28mm
25.4cc
1.0kW/8500rpm
230ml
160ml
10"-14"
3/8"
.050"
4.9kg/3.8kg



500Hours  
Working time

PROFESSIONAL BRUSH CUTTER  
NTB450B

2022 new model, with our NEWTOP own patent, starter logo embossed instead of paper sticker, more stable and attractive.



41.5CC Displacement

1.47KW Rated Power

7.6KG Dry Weight



NEW



NTB450B


NTB500B

Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of AI.Pipe  
G.W./N.W.

G45  
41.5cc  
1.47kW/7800rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
900ml  
26mm/28mm  
10kg/7.6kg

G50  
45.7cc  
1.65kW/7500rpm  
900ml  
26mm/28mm  
10.1kg/7.7kg

CE



+ 20%

CUTTING EFFICIENCY INCREASED BY 20%\*  
\*compared with a similar product in the market

Light Trimming Medium Trimming Heavy Trimming





PROFESSIONAL BRUSH CUTTER  
NTB520A

Compact and smooth exterior design, more user-friendly and much easier to operate. Reversible air filter cover makes it easy for installing and replacement of parts. Stable and powerful engine, proper for most forestry, agricultural and emergency work.



51.7CC Displacement

1.65KW Rated Power

7.8KG Dry Weight



W HANDLE

Brand new rubber W handle, with a comfortable grip.

AIR FILTER SYSTEM

The air filter can be quickly replaced by the convenient air filter design.



HIGH-QUALITY GEAR BOX

High-quality gear box, used with the blade, easy to cut branches.



POWER ENGINE

with high configuration, stable power output, suitable for different usage scenarios.



NEWTOP

GASOLINE BRUSH CUTTER



Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

NTB520A

1E44FA  
51.7cc  
1.65kW/7600rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
1300ml  
26mm  
10kg/7.8kg


NTB430A

1E40F-5A  
42.7cc  
1.34kW/8000rpm  
1300ml  
26mm  
10kg/7.8kg

NTB330A

1E36F-2A  
32.6cc  
1.1kW/7500rpm  
850ml  
26mm  
9.7kg/7.5kg

CE



Light Trimming Medium Trimming Heavy Trimming



PROFESSIONAL BRUSH CUTTER  
NTB520B

This petrol brush cutter from NEWTOP enjoys a heavy-duty 52cc two-stroke engine, delivering 3.0 horsepower of torque. It is ideal for domestic customers with larger gardens or professional landscapers.



51.7CC Displacement

1.65KW Rated Power

7.6KG Dry Weight



HIGH-QUALITY GEAR BOX

High-quality gear box, used with the blade, easy to cut branches.

DAMPING SYSTEM

Anti-Vibration System provides maximum comfort to get more done with less fatigue.



26mm DRIVE TUBE

Solid steel drive shaft provides smooth and efficient power transfer from the engine to the cutting head.

52cc ENGINE

Commercial grade engine provides excellent performance and durability.



GASOLINE BRUSH CUTTER

	NTB520B	NTB430B	NTB330B
Match Engine	1E44FA	1E40F-5B	1E36F-2B
Displacement	51.7cc	42.7cc	32.6cc
Power & Relevant Speed	1.65kW/7600rpm	1.34kW/8000rpm	1.1kW/7500rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)		
Capacity	900ml	900ml	750ml
Diameter Of Al.Pipe	26mm	26mm	26mm
G.W./N.W.	9.8kg/7.6kg	9.8kg/7.6kg	9.5kg/7.3kg

CE



- Light Trimming
- Medium Trimming
- Heavy Trimming



PROFESSIONAL BRUSH CUTTER  
NTB520C



This versatile petrol brushcutter boasts a punchy 52cc two-stroke air-cooled engine, which delivers 2.0 horsepower. The handlebar and harness ensure easy handling and reduce the strain on the back and muscles.

51.7CC Displacement


1.65KW Rated Power

8.3KG Dry Weight



	NTB520C	NTB430C
Match Engine	1E44FA	1E40F-5A
Displacement	51.7cc	42.7cc
Power & Relevant Speed	1.65kW/7600rpm	1.34kW/8000rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)	
Capacity	900ml	900ml
Diameter Of Al.Pipe	26mm	26mm
G.W./N.W.	10.4kg/8.3kg	10.4kg/8.3kg

CE



PROFESSIONAL BRUSH CUTTER  
NTB520E



The NEWTOP NTB520E is a lightweight, yet powerful straight shaft petrol Brush cutter. Smart pull Recoil - this feature allows effortless starting by reducing the resistance on the Starter rope. Metal 255mm three - toothed blade for tackling tougher jobs.

51.7CC Displacement


1.65KW Rated Power

7.8KG Dry Weight



	NTB520E	NTB430E
Match Engine	1E44FA	1E40F-5A
Displacement	51.7cc	42.7cc
Power & Relevant Speed	1.65kW/7600rpm	1.34kW/8000rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)	
Capacity	1300ml	1300ml
Diameter Of Al.Pipe	26mm	26mm
G.W./N.W.	10kg/7.8kg	10kg/7.8kg

CE



Light Trimming Medium Trimming Heavy Trimming



PROFESSIONAL BRUSH CUTTER  
NTB143

Light weight Brushcutter  
easy-start,easy maintenance,  
easy-operation.



41.5CC Displacement

1.47KW Rated Power

7.8KG Dry Weight



NTB143



Match Engine	1E40F-9
Displacement	41.5cc
Power & Relevant Speed	1.47kW/7800rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Capacity	950ml
Diameter Of Al.Pipe	28mm
G.W./N.W.	10kg/7.8kg



PROFESSIONAL BRUSH CUTTER  
NTB541

Light weight Brushcutter  
easy-start,easy maintenance,  
easy-operation.



41.5CC Displacement

1.47KW Rated Power


7.8KG Dry Weight



NTB541



Match Engine	1E40F-9
Displacement	41.5cc
Power & Relevant Speed	1.47kW/7800rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Capacity	940ml
Diameter Of Al.Pipe	28mm
G.W./N.W.	10kg/7.8kg



Light Trimming Medium Trimming Heavy Trimming



PROFESSIONAL BRUSH CUTTER  
NTB500



Low fuel consumption, more fuel efficient, more durable.  
New paper air filter, good filtering effect.  
Aluminum plate muffler, low noise.  
Diaphragm carburetor, better atomization effect.

41.5CC Displacement

1.47KW Rated Power

7.8KG Dry Weight



Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.


NTB500



NTB800



40E	50E
40.2cc	50.8cc
1.47kW/7500rpm	2.0kW/7500rpm
25: 1 (Gasoline25:Two-cycle Oil 1)	
1150ml	1150ml
28mm	28mm
11kg/9.5kg	11kg/9.5kg



PROFESSIONAL BRUSH CUTTER  
NTB415



Low fuel consumption, more fuel efficient, more durable.  
New paper air filter, good filtering effect.  
Aluminum plate muffler, low noise.  
Diaphragm carburetor, better atomization effect.

41.5CC Displacement

1.47KW Rated Power

7.8KG Dry Weight



NTB415



Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

1E40F-9
41.5cc
1.47kW/8000rpm
25: 1 (Gasoline25:Two-cycle Oil 1)
930ml
28mm
10kg/7.8kg



- Light Trimming
- Medium Trimming
- Heavy Trimming



**PROFESSIONAL BRUSH CUTTER**  
**NTS140CG**



NEWTOP NTS140CG are developed to handle many years of tough operation. The engine deliver high power ensure that you can work efficiently in all conditions. If you choose our NTS140CG, no noise will disturb the surroundings.

35.8CC Displacement

0.9KW Rated Power

7.0KG Dry Weight



**HIGHT-QUALITY GEAR BOX**  
Specially designed gear box enables smooth operation. Powerful engine ensures efficient operation.



**ALLOY HARD AXIS**  
Super wear-resistant carbide hard shaft provides stable transmission.

**4 STROKE ENGINE**  
Four-stroke engine features the machine with stable operation, low noise and longevity.



**PROFESSIONAL BRUSH CUTTER**  
**NTS140BG**



Elaborately matched high quality carburetor enables stable power output. Super wear-resistant carbide hard shaft provides stable transmission. Backpack brush cutters are easily used in hills, terraces etc.

35.8CC Displacement

0.9KW Rated Power

8.0KG Dry Weight



**NTS140CG**



Match Engine	GX35
Displacement	35.8cc
Power & Relevant Speed	0.9kW/6800rpm
Capacity	500ml
Diameter Of Al. Pipe	28mm
G.W./N.W.	8.8kg/7kg

**NTS140BG**



Match Engine	GX35
Displacement	35.8cc
Power & Relevant Speed	0.9kW/6800rpm
Capacity	500ml
Diameter Of Al. Pipe	28mm
G.W./N.W.	9.8kg/8kg



Light Trimming Medium Trimming Heavy Trimming



PROFESSIONAL BRUSH CUTTER  
NTB260A

Small size and light weight.  
Easy to start, stable performance.  
Low fuel consumption, one-handed operation.  
Suitable for the elderly and women.



25.4CC Displacement

0.65KW Rated Power

6.5KG Dry Weight



NTB260A



Match Engine	1E34F
Displacement	25.4cc
Power & Relevant Speed	0.65kW/7500rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Capacity	650ml
Diameter Of Al.Pipe	26mm
G.W./N.W.	8kg/6.5kg

CE



Light Trimming Medium Trimming Heavy Trimming

PROFESSIONAL BRUSH CUTTER  
NTB260B

Powered by a 26cc air-cooled 2-stroke petrol engine, the NTB260B grass trimmer features easy recoil pull start, making light work of trimming all types of grass, nettles, shrubs and overgrowth.



25.4CC Displacement

0.85KW Rated Power

6.5KG Dry Weight



**Double Layer Air Filter**  
The newly designed air filter has a double-layer filtering effect. (equipped with mesh filter + air filter sponge).

**Easy Starter**  
The new model is an easy starter, supported by 2 springs, which is much easier to get started.



**New Design**  
Compared with the old one, this one looks more user-friendly.



NTB260B

NTB320B

Match Engine	1E34F	1E38F
Displacement	25.4cc	31.7cc
Power & Relevant Speed	0.85kW/7500rpm	1.2kW/8600rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)	
Capacity	900ml	900ml
Diameter Of Al.Pipe	26mm	26mm
G.W./N.W.	8kg/6.5kg	8.1kg/6.6kg

CE



+ 23%

CUTTING EFFICIENCY INCREASED BY 23%\*  
\*compared with a similar product in the market







## POLE SAW

# NEWTOP

### PROFESSIONAL POLE SAW

#### NTPS260A


Low fuel consumption and stable, Tube of different length available. Small weight and easy for operation. Widely used for cutting trees in gardens and along the streets..



**26CC** Displacement

**0.65KW** Rated Power

**6.0KG** Dry Weight

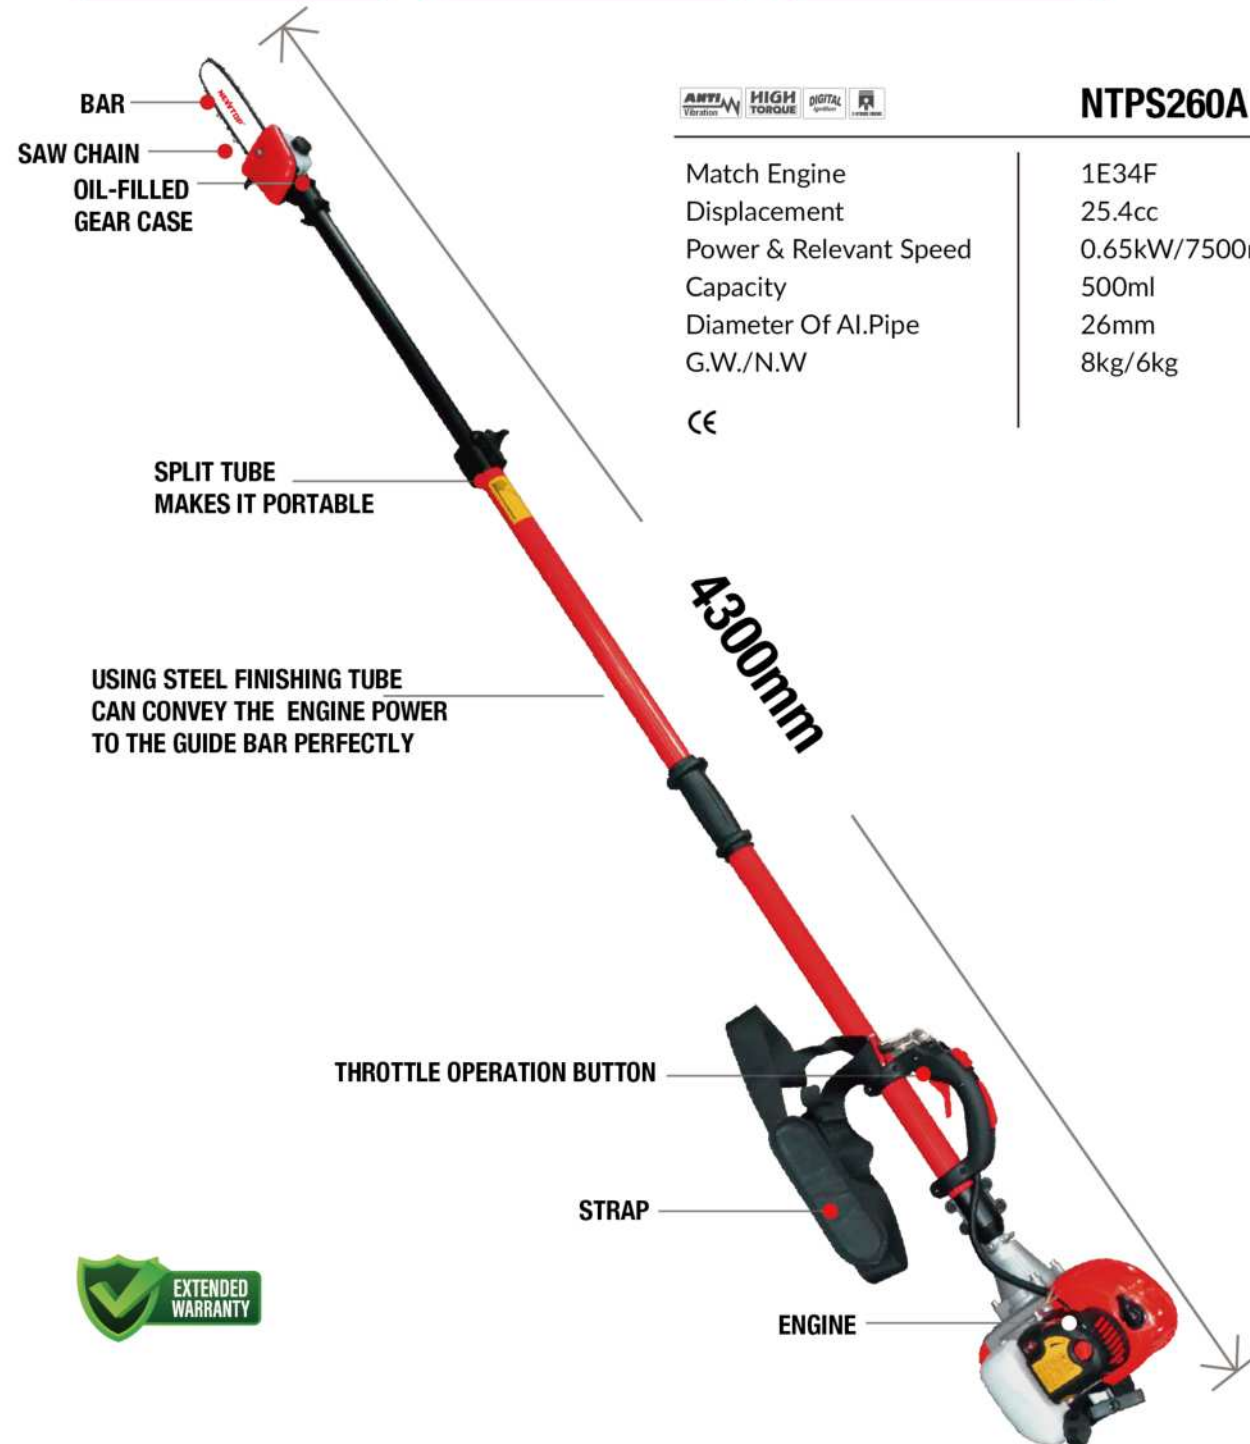

#### NTPS260A

Match Engine	1E34F
Displacement	25.4cc
Power & Relevant Speed	0.65kW/7500rpm
Capacity	500ml
Diameter Of Al.Pipe	26mm
G.W./N.W	8kg/6kg

CE



#### NTPS260B

Match Engine	G26
Displacement	25.4cc
Power & Relevant Speed	0.85kW/7500rpm
Capacity	500ml
Diameter Of Al.Pipe	26mm
G.W./N.W	7.2kg/5.8kg

CE







PROFESSIONAL MULTIFUNCTION TOOLS

NTMU520B4IN1

This flexible gardening tool combines a brush cutter, pole pruner, grass trimmer and hedge trimmer into one convenient and affordable package. Based on a reliable air-cooled, 2 stroke engine this landscaping multi-tool is both efficient and packed with enough power to make even the most demanding of projects a breeze.



**51.7CC** Displacement

**1.65KW** Rated Power

**15.7KG** Dry Weight



**A** POLE SAW

**C** EXTENSION SHAFT

**B** HEDGE TRIMMER

**D** BRUSH CUTTER

**NEWTOP**



MULTIFUNCTION TOOLS

NTMU520B4IN1



Engine Type	2 Stroke
Displacement	51.7cc
Power & Relevant Speed	1.65kW/7600rpm
Cluth Speed	4500rpm
Transmission Bar	26mm
Weight	15.7kg

CE







PROFESSIONAL SPRAYERS



NTS428

NEWTOP NTS428 mist duster is a machine for professional use, but at the same time very simple to use, because you just have to regulate the throttle and the tap.

77CC Displacement

3.6KW Rated Power

11.5KG Dry Weight

PROFESSIONAL SPRAYERS



NTS423

It breaks the spray into very small droplets and distributes them evenly over a large area. A mist blower uses less chemical than a more traditional coarse liquid spray.

72.3CC Displacement

3.0KW Rated Power

11.5KG Dry Weight

NTS428



Engine	2 Stroke
Rated Out Put Power	3.6kW/5.0hp
Displacement	77cc
Carburator Type	Float or Diaphragm
Container Capacity	17L
Fuel Tank Capacity	1.9L
Max Air Flow Rate	1300m³/h
Horizontal Reach	20m
G.W./N.W.	13kg/11.5kg

CE



NTS423



Engine	2 Stroke
Rated Out Put Power	3.0kW/4.1hp
Displacement	72.3cc
Carburator Type	Float
Container Capacity	12L
Fuel Tank Capacity	1.4L
Max Air Flow Rate	1300m³/h
Horizontal Reach	15m
G.W./N.W.	13kg/11.5kg

CE







PROFESSIONAL SPRAYERS

NTS420

Ideal for distributing liquid or solid insecticides, fertilizers or herbicides, the SURTEC NTS420 easily converts from misting to dusting applications without special tools or additional equipment. .

56.5CC

Displacement

2.6KW

Rated Power

10.6KG

Dry Weight



NTS420



Engine	2 Stroke
Rated Out Put Power	2.6kW
Displacement	56.5cc
Carburator Type	Diaphragm
Container Capacity	14L/20L
Fuel Tank Capacity	1.5L
Max Air Flow Rate	1300m³/h
Horizontal Reach	15m
G.W./N.W.	12kg/10.6kg

CE



HAND & GASOLINE SPRAYER





PROFESSIONAL SPRAYERS

NTS3WF-3

The NEWTOP NTS3WF-3 mist duster construction design of the machine is modern, the most parts of the machine are all made of plastic and light aluminum alloy, hence the machine is lighter, anti-corrosion and comfortable with carrying it.

41.5CC Displacement

2.13KW Rated Power

11.5KG Dry Weight

NTS3WF-3

Engine	2 Stroke
Rated Out Put Power	2.13kW
Displacement	41.5cc
Carburator Type	Float
Container Capacity	14L/20L
Fuel Tank Capacity	1.3L
Max Air Flow Rate	1100m³/h
Horizontal Reach	15m
G.W./N.W.	13.5kg/11.5kg

CE



PROFESSIONAL SPRAYERS

NTS4025

They are ideal to spray insecticides, pesticides, fungicides, herbicides etc. in field areas to protect the crop from pest attack. These Sprayers have multiple applications, and are widely used in agriculture, horticulture, sericulture, plantations, forestry, gardens etc.

35.8CC Displacement

1.0KW Rated Power

12KG Dry Weight

NTS4025

Engine	4 Stroke
Rated Out Put Power	1.0kW
Displacement	35.8cc
Carburator Type	Diaphragm
Container Capacity	25L
Fuel Tank Capacity	0.63L
Horizontal Reach	15m
G.W./N.W.	13kg/12kg

CE







PROFESSIONAL SPRAYERS



NTS768

Knapsack Power Sprayer 768 is easy to use and highly durable. Designed in sync with the industrial standards, these sprayers are immensely used for garden spraying-weed, pest control, liquid fertilizing and plant leaf polishing.

**26CC** Displacement

**0.75KW** Rated Power

**10KG** Dry Weight

NTS768



Engine	2 Stroke
Rated Out Put Power	0.75kW
Displacement	26cc
Carburator Type	Diaphragm
Container Capacity	25L
Fuel Tank Capacity	0.65L
Horizontal Reach	15m
G.W./N.W.	12kg/10kg

CE



PROFESSIONAL SPRAYERS



NTS767

This backpack gasoline power sprayer is deliberately designed to make spray jobs more efficient and more convenient. It is generally used in plant protection treatment for vegetables, rice, sugarcane, fruit trees, coffee trees and etc. It is also very good to be used for public sanitation and disinfection because of its good movability.

**31.3CC** Displacement

**0.7KW** Rated Power

**12.5KG** Dry Weight

NTS767



Engine	139 - 4 Stroke
Rated Out Put Power	0.7kW
Displacement	31.3cc
Carburator Type	Diaphragm
Container Capacity	25L
Fuel Tank Capacity	0.65L
Horizontal Reach	15m
G.W./N.W.	14kg/12.5kg

CE







PROFESSIONAL SPRAYERS

NTS20C5

The stable pump can easily be operated with one hand. The robust spray hose lets you achieve an even spray. You can turn spray nozzles to easily swap between a fine mist and a targeted stream.

1.3M Horizontal Range

Manual Motor Type

0.2-0.4Mpa Pressure



NTS20C5

Chemist Tank Capacity	20L
Spraying Horizontal Range	1.3m
Motor Type	Manual
Hose Nozzle Type	Single and Double
Pressure	0.2-0.4Mpa
Weight	2.7kg



PROFESSIONAL SPRAYERS

NTS20C2/NTS16C2

The stable pump can easily be operated with one hand. The robust spray hose lets you achieve an even spray. You can turn spray nozzles to easily swap between a fine mist and a targeted stream.

1.3M Horizontal Range

Manual Motor Type

0.2-0.4Mpa Pressure



NTS20C2

NTS16C2

Chemist Tank Capacity	20L	16L
Spraying Horizontal Range	1.3m	1.3m
Motor Type	Manual	Manual
Hose Nozzle Type	Single and Double	Single and Double
Pressure	0.2-0.4Mpa	0.2-0.4Mpa
Weight	2.7kg	2.5kg



PROFESSIONAL SPRAYERS

NTS20Z3/NTS16Z3

The stable pump can easily be operated with one hand. The robust spray hose lets you achieve an even spray. You can turn spray nozzles to easily swap between a fine mist and a targeted stream.

1.3M Horizontal Range

Manual Motor Type

0.2-0.4Mpa Pressure



NTS20Z3

NTS16Z3

Chemist Tank Capacity	20L	16L
Spraying Horizontal Range	1.3m	1.3m
Motor Type	Manual	Manual
Hose Nozzle Type	Single and Double	Single and Double
Pressure	0.2-0.4Mpa	0.2-0.4Mpa
Weight	2.7kg	2.5kg





# PROFESSIONAL EARTH AUGER

## NTEA520F

The NEWTOP Earth Auger is the perfect tool for quickly and effortlessly bring into the ground to set for Fence Posts, Trees, Poles, Shrubs etc.



51.7CC

Displacement

1.6KW

Rated Power

1.3L

Capacity

### METAL GEARBOX WITH GEAR REDUCTION

Robust design and a ratio of appropriate reduction to achieve greater strength in the cut.



### HELICOIDAL DRILL

Specific design to achieve the highest capacity of extraction of sand.

### EARTH AUGER BIT

They get the highest resistance to drill on any surface.

## NTEA520F



Match Engine	1E44FA
Displacement	51.7cc
Standard Power	1.6kW/7500rpm
Mixed Fuel Rate	25:1
Capacity	1.3L
Drive Mode	Gear Drive
Drive Ration	30:1
Drill	6"/8"/10"
Module Of Gear	1.85

CE

Optional drill bits:5"/6"

All models can be matched with different engines, arm frames and drill bits.



# PROFESSIONAL EARTH AUGER

## NTEA520A

The NEWTOP Earth Auger is the perfect tool for quickly and effortlessly bring into the ground to set for Fence Posts, Trees, Poles, Shrubs etc.



51.7CC

Displacement

1.6KW

Rated Power

1.3L

Capacity



Match Engine	1E44FA
Displacement	51.7cc
Standard Power	1.6kW/7500rpm
Mixed Fuel Rate	25:1
Capacity	1.3L
Drive Mode	Gear Drive
Drive Ration	30:1
Drill	6"/8"/10"
Module Of Gear	1.85

CE

Optional drill bits:5"/6"

All models can be matched with different engines, arm frames and drill bits.



## NTEA520A

## NTEA430A

Match Engine	1E40F-5A
Displacement	42.7cc
Standard Power	1.3kW/7500rpm
Mixed Fuel Rate	25:1
Capacity	1.3L
Drive Mode	Gear Drive
Drive Ration	30:1
Drill	6"/8"
Module Of Gear	1.85



## PROFESSIONAL EARTH AUGER

### NTEA520B

The NEWTOP Earth Auger is the perfect tool for quickly and effortlessly boring into the ground to set for Fence Posts, Trees, Poles, Shrubs etc.



**51.7CC** Displacement

**1.6KW** Rated Power

**1.3L** Capacity



#### NTEA520B

#### NTEA430B

Match Engine	1E44FA	1E40F-5B
Displacement	51.7cc	42.7cc
Standard Power	1.6kW/7500rpm	1.3kW/7500rpm
Mixed Fuel Rate	25:1	25:1
Capacity	1.3L	1.3L
Drive Mode	Gear Drive	Gear Drive
Drive Ration	30:1	30:1
Drill	10"	10"
Module Of Gear	1.85	1.85

CE



Optional drill bits:5"/6"/8"

All models can be matched with different engines, arm frames and drill bits.

## PROFESSIONAL EARTH AUGER

### NTEA520E

The NEWTOP Earth Auger is the perfect tool for quickly and effortlessly boring into the ground to set for Fence Posts, Trees, Poles, Shrubs etc.



**51.7CC** Displacement

**1.6KW** Rated Power

**1.3L** Capacity



#### NTEA520E

#### NTEA430E

Match Engine	1E44FA	1E40F-5B
Displacement	51.7cc	42.7cc
Standard Power	1.6kW/7500rpm	1.3kW/7500rpm
Mixed Fuel Rate	25:1	25:1
Capacity	1.3L	1.3L
Drive Mode	Gear Drive	Gear Drive
Drive Ration	30:1	30:1
Drill	10"	10"
Module Of Gear	1.85	1.85

CE



Optional drill bits:5"/6"/8"

All models can be matched with different engines, arm frames and drill bits.

## PROFESSIONAL TEA PICKING MACHINE

### NTTH260

The NEWTOP NTTH260 handheld tea plucker is mainly used for tea picking in mountain, hilly, plain and other terrain. It is produced with international advanced technology. It has the advantages of low noise, large air volume, stable quality and high production efficiency. It is an ideal machine for tea picking.



**25.4CC** Displacement

**0.8KW** Rated Power

**460L** Capacity



### NTTH260



Power type	Single Cylinder, Two-stroke, Air-cooling
Cylinder displacement	25.4cc
Power output	0.8kW/1.0hp/8000rpm
Idle speed	2800/3200r/min
Cutting Width	650mm
Max engine speed with cutting attachment	10000r/min
Carburetor type	Diaphragm
Fuel capacity	460ml (15.71 oz.)
Fuel mixture ratio	25:1(Gasoline 40 : Two-cycle Oil 1)
Ignition system	Digital
Dry weight	11kg (23 lbs.)
Gross weight	13kg (28 lbs.)

CE







**PROFESSIONAL HEDGE TRIMMER**  
**NTH23S**

-Double blade flywheel, better cooling effect. -High-precision P5 main bearing provides more power to the machine.  
-With front and rear spring shock-absorber, which perfectly reduce the vibration and fatigue of the arms.  
-The rear handle can be rotated to 180° for multi-angle adjustment.

**22.5CC** Displacement    **0.65KW** Rated Power    **650mm** Cutting Length

**NTH23S**

Match Engine	1E32F-B
Bore Stroke	Φ 32/28mm
Displacement	22.5cc
Standard Power	0.65kW/7500rpm
Carburetor Form	Diaphragm
Fuel Mixture Ratio	25:1
Blade Cutting Length	650mm
Weight	5.6kg



**PROFESSIONAL HEDGE TRIMMER**  
**NTH23B**

-Double blade flywheel, better cooling effect. -High-precision P5 main bearing provides more power to the machine.  
-With front and rear spring shock-absorber, which perfectly reduce the vibration and fatigue of the arms.  
-The rear handle can be rotated to 180° for multi-angle adjustment.

**22.5CC** Displacement    **0.65KW** Rated Power    **650mm** Cutting Length

**NTH23B**

Match Engine	1E32F-B
Bore Stroke	Φ 32/28mm
Displacement	22.5cc
Standard Power	0.65kW/7500rpm
Carburetor Form	Diaphragm
Fuel Mixture Ratio	25:1
Blade Cutting Length	650mm
Weight	5.6kg



**PROFESSIONAL HEDGE TRIMMER**  
**NTH23C**

-Double blade flywheel, better cooling effect. -High-precision P5 main bearing provides more power to the machine.  
-With front and rear spring shock-absorber, which perfectly reduce the vibration and fatigue of the arms.  
-The rear handle can be rotated to 180° for multi-angle adjustment.

**22.5CC** Displacement    **0.65KW** Rated Power    **650mm** Cutting Length

**NTH23C**

Match Engine	1E32F-B
Bore Stroke	Φ 32/28mm
Displacement	22.5cc
Standard Power	0.65kW/7500rpm
Carburetor Form	Diaphragm
Fuel Mixture Ratio	25:1
Blade Cutting Length	650mm
Weight	5.6kg







PROFESSIONAL LEAF BLOWER



NTLB260

Use NEWTOP 26cc petrol leaf blower to keep your garden and outside areas free of leaves and other debris. Featuring a 26cc engine, this extremely durable petrol leaf blower is powerful enough to tackle any task however big or small.

25.4CC Displacement

0.75KW Max Power

72M/S Air Speed

NTLB260



Type	Portable
Discharging Capacity	25.4cc
Max Power	0.75kW
Air Speed	72m/s
Air Volume	520m³/h
Oil-tank Capacity	450ml
G.W./N.W.	5.8kg/4.5kg



PROFESSIONAL LEAF BLOWER



NTLB260A

This left blower is gasoline power tools. It is widely used in cleaning the leaves, dust, waste and grass which are cutting off.

25.4CC Displacement

0.9KW Max Power

65M/S Air Speed

NTLB260A



Type	Portable
Discharging Capacity	25.4cc
Max Power	0.9kW
Air Speed	65m/s
Air Volume	820m³/h
Oil-tank Capacity	450ml
G.W./N.W.	6.2kg/5.0kg



CE EURO V EMC





PROFESSIONAL LEAF BLOWER



NTLB850A

This NEWTOP NTLB850A back pack leaf blower features an easy starting 75.6cc engine mounted on an ergonomically designed padded back pack allowing you to take the weight off your arms and support it on your back in comfort.

75.6CC Displacement

3.7KW Max Power

86M/S Air Speed



	NTLB850A	NTLB650A
Type	Backpack	Backpack
Discharging Capacity	75.6cc	63.3cc
Max Power	3.7kW	2.7kW
Air Speed	86m/s	96m/s
Air Volume	1850m³/h	1502m³/h
Oil-tank Capacity	2100ml	2100ml
G.W./N.W.	13.6kg/11kg	12.8kg/10.5kg

CE EURO V EMC

EXTENDED WARRANTY

PROFESSIONAL LEAF BLOWER



NTLB850B

This NEWTOP NTLB850B back pack leaf blower features an easy starting 75.6cc engine mounted on an ergonomically designed padded back pack allowing you to take the weight off your arms and support it on your back in comfort.

75.6CC Displacement

3.7KW Max Power

104M/S Air Speed



	NTLB850B
Type	Backpack
Discharging Capacity	75.6cc
Max Power	3.7kW
Air Speed	104m/s
Air Volume	1692m³/h
Oil-tank Capacity	2600ml
G.W./N.W.	13.6kg/11kg

CE EURO V EMC

EXTENDED WARRANTY







PROFESSIONAL WATER PUMP

NTLB850C

This NEWTOP NTLB850C back pack leaf blower features an easy starting 75.6cc engine mounted on an ergonomically designed padded back pack allowing you to take the weight off your arms and support it on your back in comfort.

81.6CC

Displacement

3.6KW

Max Power

118M/S

Air Speed

NTLB850C	
Type	Backpack
Discharging Capacity	81.6cc
Max Power	3.6kW
Air Speed	118m/s
Air Volume	2016m³/h
Oil-tank Capacity	2200ml
G.W./N.W.	13.6kg/11kg
<div> <div> <div>CE</div> <div>EURO V</div> <div>EMC</div> </div> <div> <div>EXTENDED WARRANTY</div> </div> </div>	



PROFESSIONAL WATER PUMP

NTWP30

Clean water pump with a high work flow and capacity to raise the water up to 30m. Recommended for water displacement work or for irrigation by flood. Pump with cast iron impeller and long-life aluminum housing.

212CC

Displacement

5.0KW

Rated Power

GASOLINE

	NTWP30	NTWP20
Inlet Size/Outlet Size	3"/3"	2"/2"
Max.flow	54m³/h	30m³/h
Lift Height	30m	30m
Suction Lift	6m	6m
Engine Type	170F	170F
Motoe Type	4 Stroke	4 Stroke
Max.Output	7.0hp	6.5hp
Displacement	212cc	196cc
Fuel Tank Capacity	3.6L	3.6L
Oil Capacity	0.6L	0.6L
N.W./G.W.	28kg/30kg	25kg/27kg
<div> <div>CE</div> </div>		







## PROFESSIONAL WATER PUMP

### NTWP30CI

The cast iron high pressure water pump driven by air-cooled gasoline engine. The pump gives you very high lift, which is often used for irrigation and washing. We choose durable, good performance material for producing the pump head.



**420CC** Displacement

**11KW** Rated Power

**GASOLINE**

Cast Iron  
Water Pump



#### NTWP30CI

Inlet Size/Outlet Size	3"/3"
Max.flow	40m³/h
Lift Height	92m
Suction Lift	6m
Engine Type	190F
Motoe Type	4 Stroke
Max.Output	15hp
Displacement	420cc
Fuel Tank Capacity	6.5L
Oil Capacity	1.1L
N.W./G.W.	50kg/52kg

#### NTWP20CI

Inlet Size/Outlet Size	2"/2"
Max.flow	30m³/h
Lift Height	80m
Suction Lift	6m
Engine Type	170F
Motoe Type	4 Stroke
Max.Output	7.0hp
Displacement	212cc
Fuel Tank Capacity	3.6L
Oil Capacity	0.6L
N.W./G.W.	24kg/26kg

## PROFESSIONAL WATER PUMP

### NTWP10

NTWP10 is typically applicable for fire fighting, high-altitude water supply, industrial, mining, water supply and drainage of enterprises and high-rise buildings, etc.



**98CC** Displacement

**1.8KW** Rated Power

**GASOLINE**



#### NTWP10

Inlet Size/Outlet Size	1"/1"
Max.flow	6m³/h
Lift Height	12m
Suction Lift	6m
Engine Type	152F
Motoe Type	4 Stroke
Max.Output	2.5hp
Displacement	98cc
Fuel Tank Capacity	1.45L
Oil Capacity	0.45L
N.W./G.W.	12kg/13kg

CE





PROFESSIONAL GENERATOR

NTGR8500

It features a Fully Loaded Power Panel that is the main control center for the Generator. The Power Panel also has the Engine Shutoff switch, Volt Meter, and Circuit Breakers. This Generator has everything a Great Generator needs, but at a price that everybody wants.



460CC Displacement

7.8KW Rated Power

GASOLINE

COPPER  
100%

Electric start



Voltage  
Frequency  
AC Rated Output  
AC Max Output  
Engine Model  
Engine Type  
Max. Output  
Displacement  
Fuel Tank Capacity  
Oil Capacity  
N. W. /G. W.

CE

NTGR8500

110V/220V/380V  
50HZ/60HZ  
7.8kW  
8.1kW  
192F  
4 stroke  
16hp  
460cc  
25L  
1.1L  
85/87kgs

NTGR7500

110V/220V/380V  
50HZ/60HZ  
6.5kW  
7.0kW  
190F  
4 stroke  
15hp  
420cc  
25L  
1.1L  
79/87kgs

NTGR6500

110V/220V/380V  
50HZ/60HZ  
5.5kW  
6.0kW  
190F  
4 stroke  
13hp  
389cc  
25L  
1.1L  
72/74kgs



GASOLINE & DIESEL GENERATOR





PROFESSIONAL GENERATOR

NTGR3500

This NEWTOP generator has an economic and compact design that offers an abundance of power. It is ideal for use in recreational, small commercial, and offers emergency power for your home.



212CC Displacement

3.0KW Rated Power

GASOLINE



	NTGR3500	NTGR3000	NTGR2500
Voltage	110V/220V	110V/220V	110V/220V
Frequency	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ
AC Rated Output	3.0kW	2.8kW	2.2kW
AC Max Output	3.2kW	3.0kW	2.5kW
Engine Model	170F	170F	170F
Engine Type	4 stroke	4 stroke	4 stroke
Max. Output	7.0hp	7.0hp	7.0hp
Displacement	212cc	212cc	212cc
Fuel Tank Capacity	14L	14L	14L
Oil Capacity	0.6L	0.6L	0.6L
N. W. /G. W.	42/44kgs	42/44kgs	40/42kgs

CE



PROFESSIONAL GENERATOR

NTGR1500

At 1200 starting watts and 1000 running watts, this rugged generator with its durable steel frame is easy to transport and provides just what you need for camping, tailgating, boating, hunting, weekend trips, family vacations and small jobs around the house.



98CC Displacement

1.0KW Rated Power

GASOLINE



	NTGR1500
Voltage	110V/220V
Frequency	50HZ/60HZ
AC Rated Output	1.0kW
AC Max Output	1.2kW
Engine Model	156F
Engine Type	4 stroke
Max. Output	3.0hp
Displacement	98cc
Fuel Tank Capacity	5.0L
Oil Capacity	0.35L
N. W. /G. W.	24/25kgs

CE







PROFESSIONAL POWER ENGINES

NTE152

This engine is light and less fuel consumption,high efficiency also with a stable horse power output.The start system of engine is recoil or key start, it is easy to operate and start.



98CC Displacement

1.8KW Rated Power

GASOLINE



Engine Model	152F
Engine Type	4 stroke
Bore X Stroke	52X46mm
Compression Ratio	6.8:1
Max. Output	1.8kW/2.5hp
Max.Torque	3.0N.m
Displacement	98cc
Fuel Consumption	≤450g/kw.h
Fuel Tank Capacity	1.45L
Oil Capacity	0.45L
N. W. /G. W.	9.5/10kgs



PROFESSIONAL POWER ENGINES

NTE156

The NEWTOP NTE156F is a small four-stroke gas engine offering superior performance and reliability. Lower noise levels, lower vibration, and lower emissions – without sacrificing power output or performance.



98CC Displacement

2.6KW Rated Power

GASOLINE



Engine Model	156F
Engine Type	4 stroke
Bore X Stroke	56X40mm
Compression Ratio	8.8:1
Max. Output	2.6kW/3.5hp
Max.Torque	4.3N.m
Displacement	98cc
Fuel Consumption	≤420g/kw.h
Fuel Tank Capacity	1.6L
Oil Capacity	0.4L
N. W. /G. W.	11/12kgs





### PROFESSIONAL POWER ENGINES

#### NTE235

The NEWTOP Engine NTE235 is used in all sorts of applications. From Pressure Washers and Construction/Industrial equipment, to Tillers/Cultivators, Generators and Commercial Lawn & Garden Equipment, Agricultural Equipment, Water Pumps, and even Go Karts, are powered by the NTE235.

236CCDisplacement

6.3KWRated Power

GASOLINE



	NTE235	NTE225	NTE210	NTE200	NTE160
Engine Model	172F	170F	170F	168FB	168F
Engine Type	4 stroke	4 stroke	4 stroke	4 stroke	4 stroke
Bore X Stroke	72X58mm	70X58mm	70X55mm	68X54mm	68X45mm
Compression Ratio	8.5:1	8.5:1	8.5:1	8.5:1	8.5:1
Max. Output	8.5hp	8.0hp	7.0hp	6.5hp	5.5hp
Max.Torque	16N.m	15N.m	13.5N.m	12.5N.m	10.5N.m
Displacement	236cc	223cc	212cc	196cc	163cc
Fuel Consumption	≤395g/kw.h	≤395g/kw.h	≤395g/kw.h	≤395g/kw.h	≤395g/kw.h
Fuel Tank Capacity	3.6L	3.6L	3.6L	3.6L	3.6L
Oil Capacity	0.6L	0.6L	0.6L	0.6L	0.6L
N. W. /G. W.	15/16kgs	15/16kgs	15/16kgs	15/16kgs	15/16kgs

### PROFESSIONAL POWER ENGINES

#### NTE460

The NEWTOP NTE Series commercial-grade engine is designed for the most demanding commercial applications. It has set an industry standard for reliability and durability. Overhead Valve design offers cooler, fuel-efficient operation and cast iron cylinder sleeve provides longer service life.

460CCDisplacement

13KWRated Power

GASOLINE



	NTE460	NTE440	NTE420	NTE390	NTE270
Engine Model	192FB	192F	190F	188F	177F
Engine Type	4 stroke	4 stroke	4 stroke	4 stroke	4 stroke
Bore X Stroke	92X69mm	92X66mm	90X66mm	88X64mm	77X58mm
Compression Ratio	8.6:1	8.6:1	8.5:1	8.2:1	8.2:1
Max. Output	18.0hp	16.0hp	16.0hp	13.0hp	9.0hp
Max.Torque	27.5N.m	27N.m	26N.m	24.5N.m	17.5N.m
Displacement	460cc	440cc	420cc	389cc	270cc
Fuel Consumption	≤370g/kw.h	≤370g/kw.h	≤370g/kw.h	≤370g/kw.h	≤375g/kw.h
Fuel Tank Capacity	6.5L	6.5L	6.5L	6.5L	6L
Oil Capacity	1.1L	1.1L	1.1L	1.1L	1L
N. W. /G. W.	31/32kgs	31/32kgs	31/32kgs	31/32kgs	27/28kgs



### Brush Cutter Handle Options



Split bike handle A



Complete bike handle A



Split bike handle B



Complete bike handle B



W Handle



D-Handle A



D-Handle B



D-Handle C



P-Handle

### Blade Options



2-Teeth Blade



3-Teeth Blade



3-Teeth Blade



4-Teeth Blade



Circular Saw Blade



8-Teeth Blade



40-Teeth Blade



80-Teeth Blade



40-T Diamond Blade A



40-T Diamond Blade B

### Trimmer Head Options



Nylon self-threading trimmer head




Nylon trimmer head old model



Nylon trimmer head new model



Nylon trimmer head



Iron trimmer head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



















Aluminum Trimmer Head





Shoulder Belt Options

 <p>A</p> <p>Strap</p>	 <p>B</p> <p>Strap</p>	 <p>C</p> <p>Strap</p>	 <p>D</p> <p>Strap</p>
 <p>E</p> <p>Strap</p>	 <p>F</p> <p>Strap</p>	 <p>G</p> <p>Strap</p>	 <p>H</p> <p>Strap</p>
 <p>I</p> <p>Strap</p>	 <p>J</p> <p>Strap</p>	 <p>K</p> <p>Strap</p>	 <p>L</p> <p>Strap</p>
 <p>M</p> <p>Strap</p>	 <p>N</p> <p>Strap</p>	 <p>O</p> <p>Strap</p>	 <p>P</p> <p>Chain Saw Bag A</p>

BRUSH CUTTER SPARE PARTS